



Food Grade Specialty Lubricants




For the Bakery, Meat & Poultry,
Pharmaceutical, Beverage & Brewery
and Packaging Industries

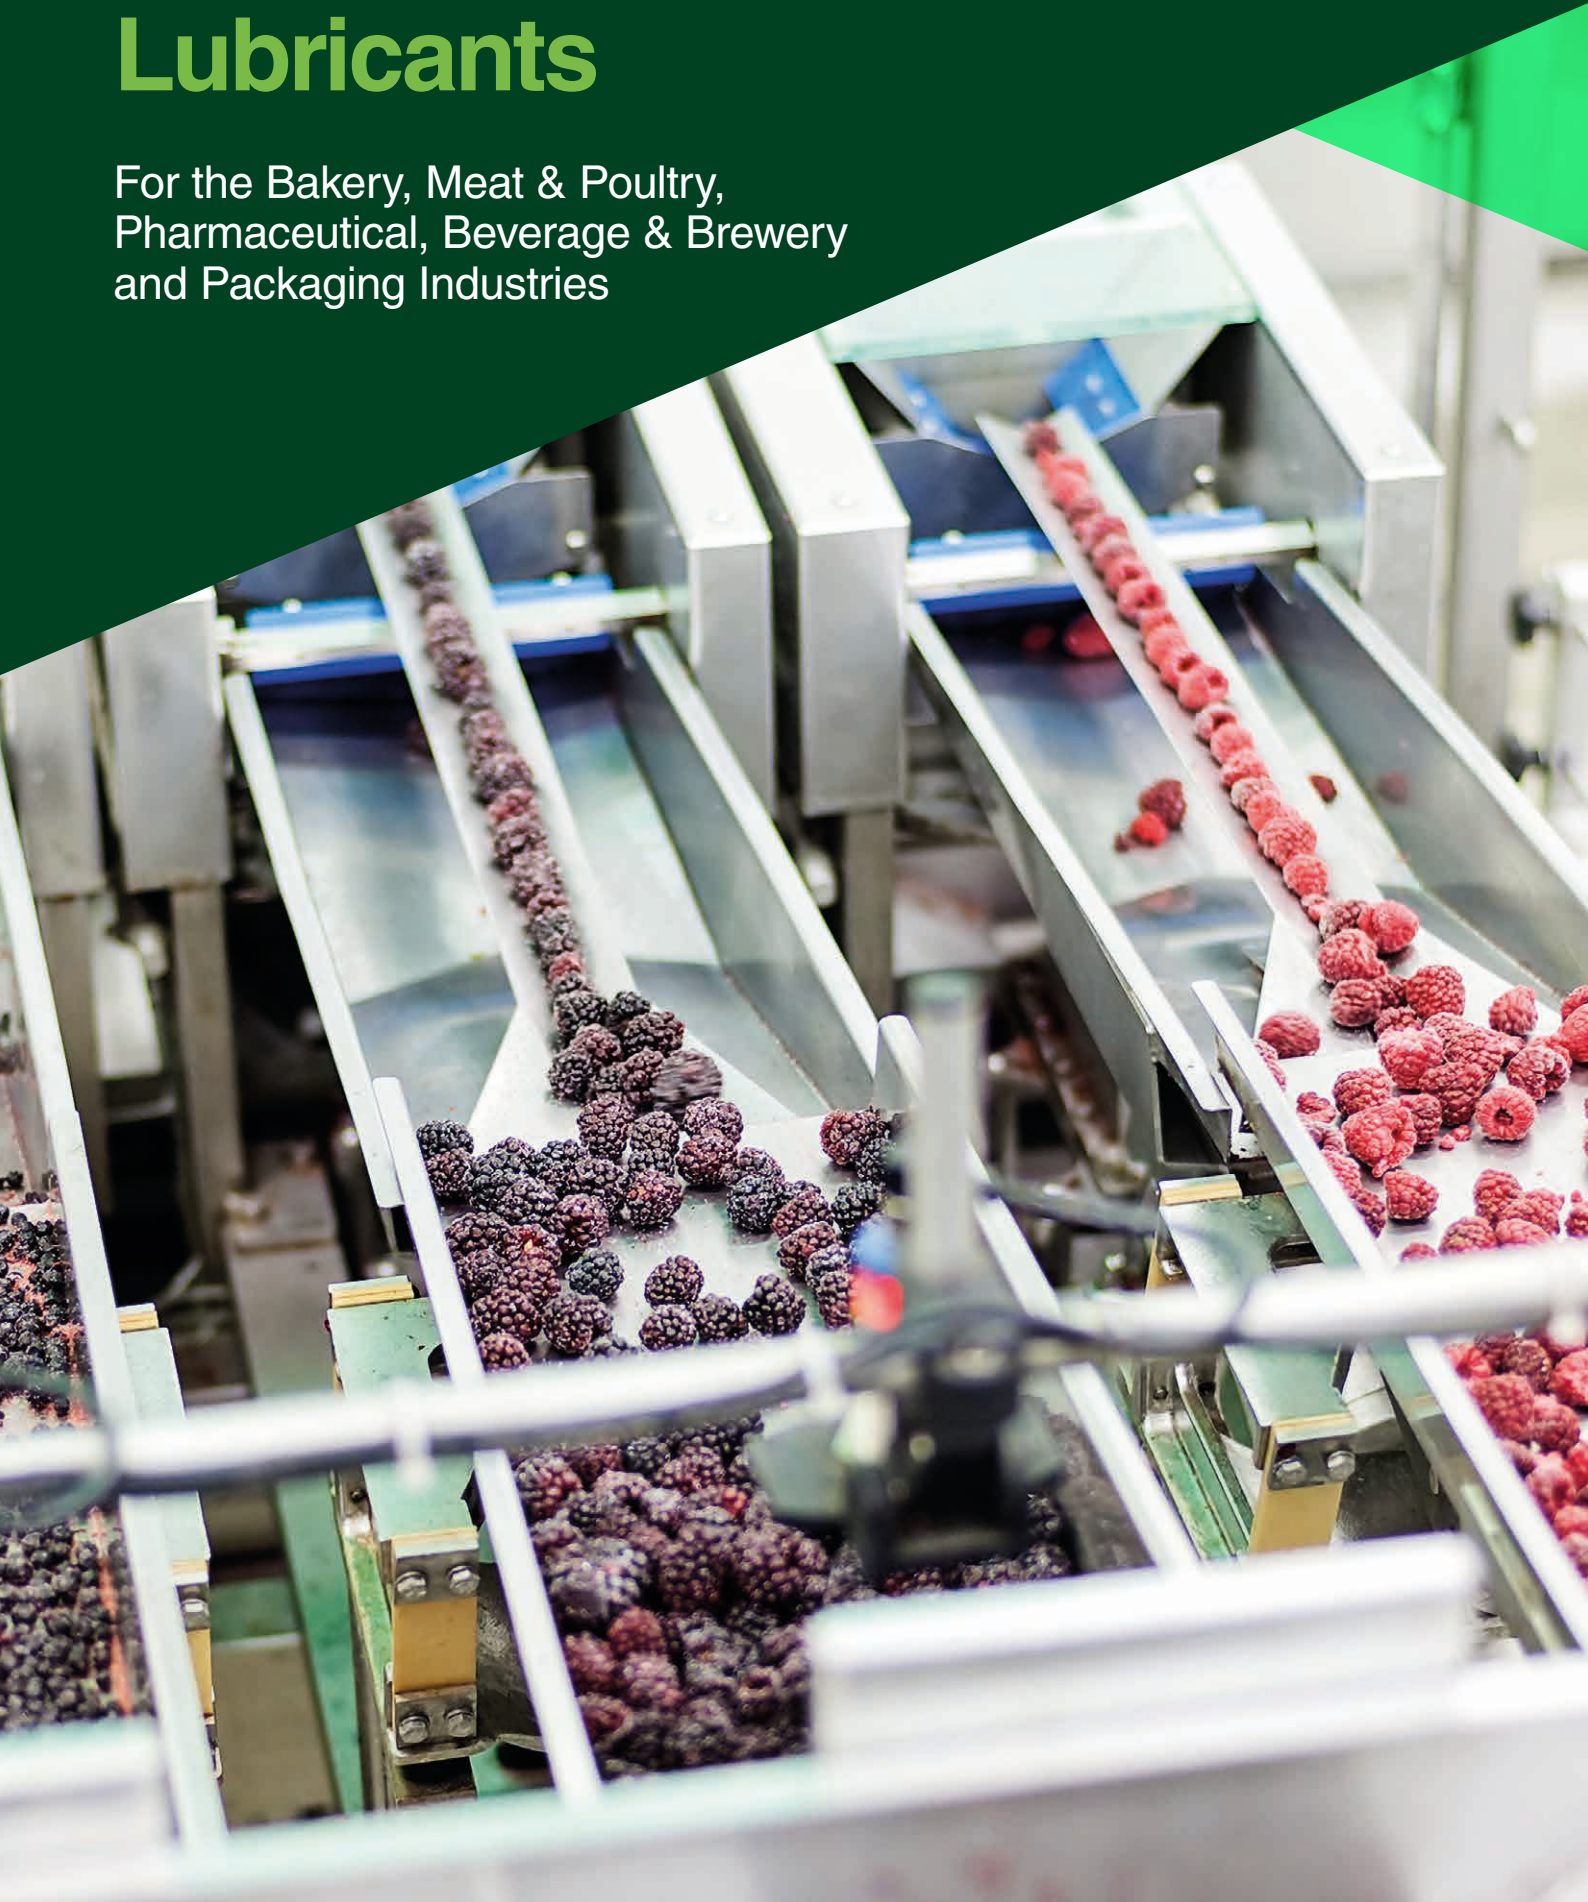

We stand for:

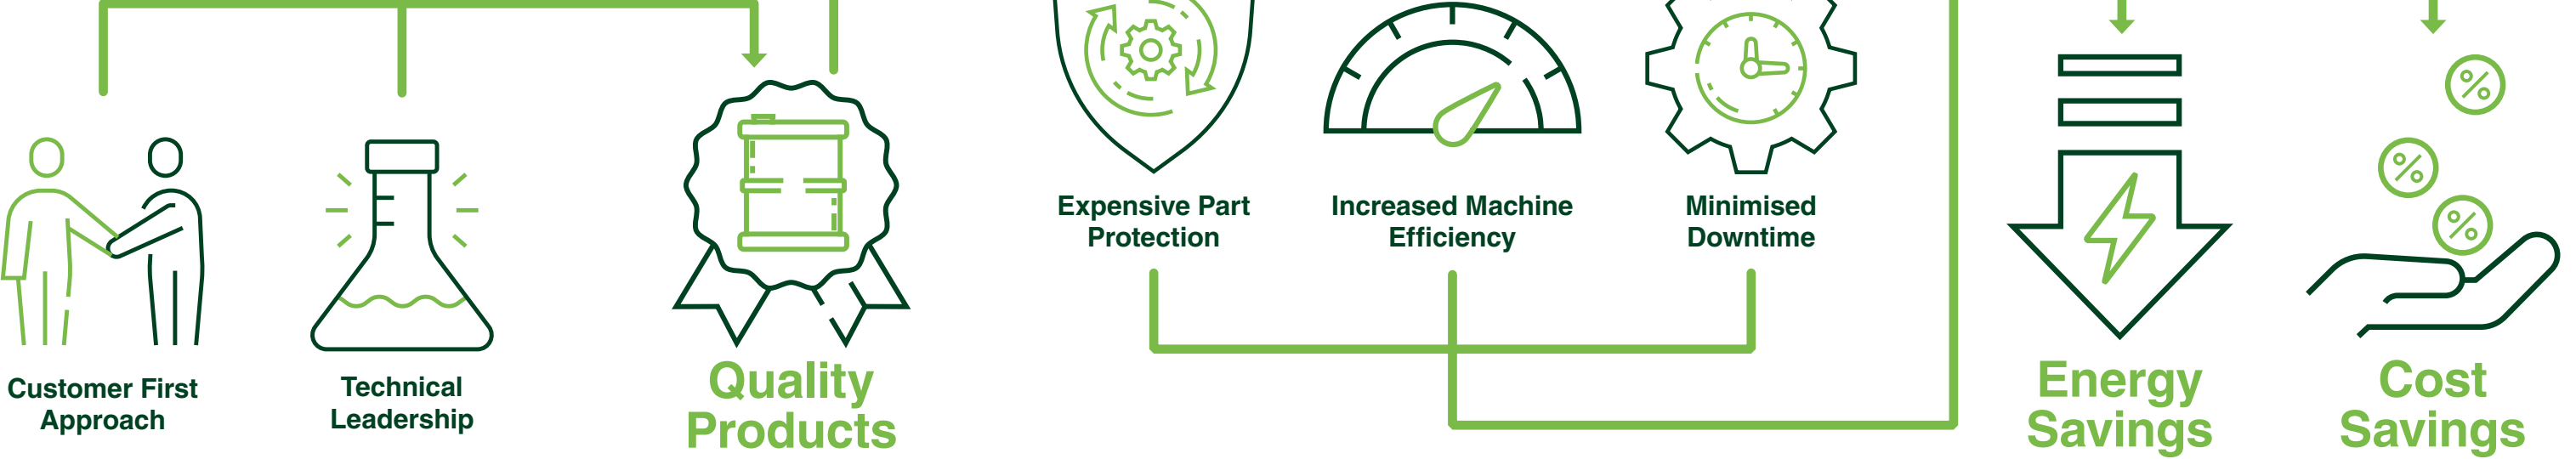

Why choose VICKERLUBE FG?

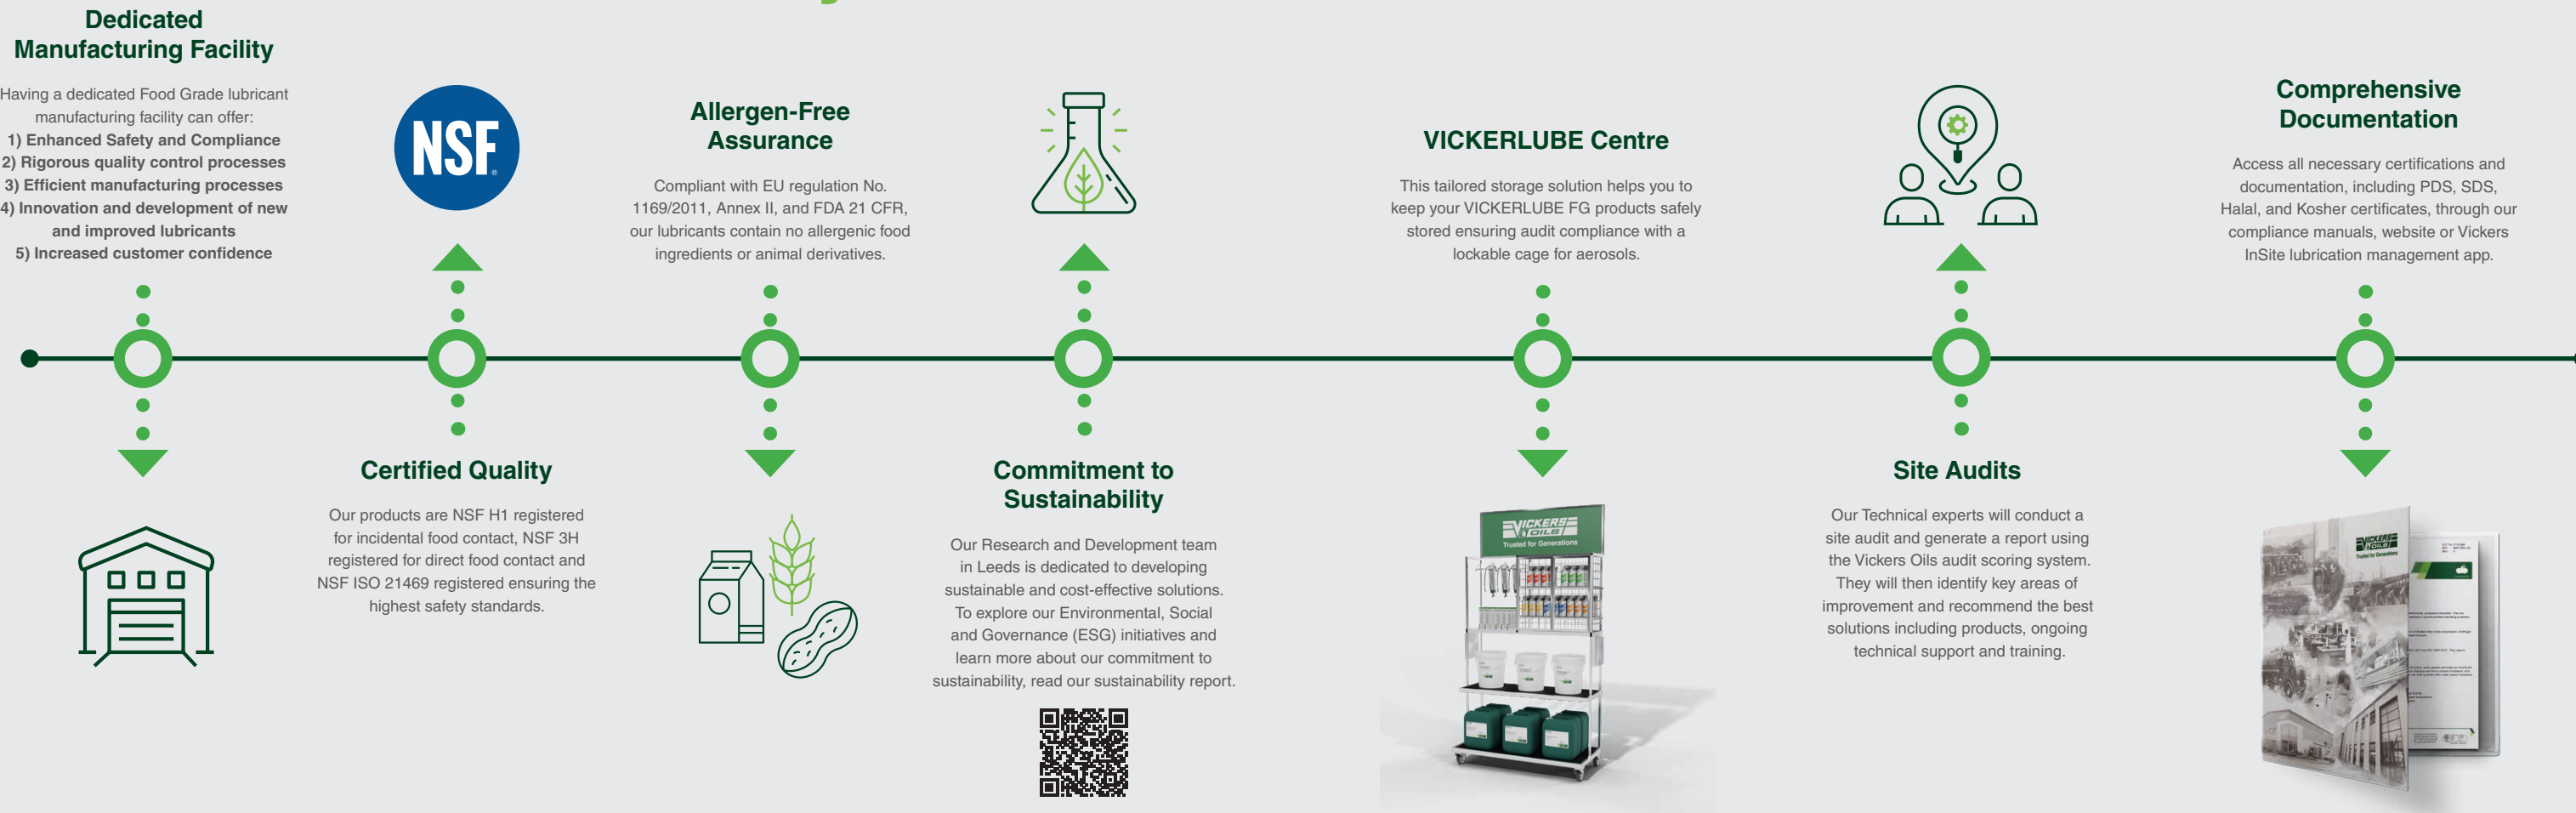

Food Grade Registrations and Certifications

Vickers Oils Food Grade Lubricants and Greases are manufactured according to ISO 9001;2015 and ISO 21469 standards, are Halal and Kosher certified and NSF H1, 3H and ISO 21469 registered. They contain no allergenic food ingredients in compliance with EU regulation No. 1169/2011, Annex II and are PFAS free.



NSF

VICKERLUBE FG products are NSF H1 & 3H registered. This means that our lubricants are safe for incidental contact with food as well as for use on surfaces which can come in direct contact with food.



NSF ISO 21469

Our dedicated Food Grade manufacturing facility is certified in accordance with the international standard NSF ISO 21469.

This standard determines the hygienic requirements for the formulation, manufacturing and storage of lubricants that may have incidental or direct contact with food products, thereby assuring that our products meet the highest safety standards.



PFAS

Vickers Oils continue to set the standard in the lubricant industry by taking a proactive approach with PFAS free formulations for the VICKERLUBE FG range, reinforcing our commitment towards sustainability.



Halal and Kosher

VICKERLUBE FG lubricants are Halal and Kosher certified meeting the stringent requirements of both Jewish and Muslim laws. These certifications ensure the highest standards of product and food safety.



Allergens

Compliant with EU regulation No. 1169/2011, Annex II, and FDA 21 CFR, VICKERLUBE FG lubricants contain no allergenic food ingredients or animal derivatives, making them safe for all food processing applications.



208L

20L

1000L

VICKERLUBE FG HTF 32

Food Grade Heat Transfer Fluid



VICKERLUBE FG HTF 32 is a premium quality, heat transfer fluid. It is registered to H1 and HT1 for incidental food contact, for use in and around food, beverage, and pharmaceutical production areas..

Applications include:

- Heat transfer systems with a bulk oil temperature range of approx. -10°C to a maximum of 325°C, where the oil film temperature should not exceed 340°C

FEATURE	BENEFIT
Protects against corrosion	Increased component life
Non-odour or tainting	No effect on food stuff

Characteristics	VICKERLUBE FG HTF 32
Appearance	Clear
Density at 15°C (g/cm3)	0.85
Viscosity at 40°C (cSt)	31
Viscosity at 100°C (cSt)	6
Flash Point (°C)	>150
Pour Point (°C)	-21
Shelf Life	3 years in original sealed containers whilst store out of direct sunlight
20L pail	 21573-020
208L drum	 21573-208
1000L IBC	 21573-001



208L

20L

1000L

VICKERLUBE FG 3H DIVIDER OIL

Food Grade 3H ISO 32 Direct Contact Corrosion Resistant Divider Oil




VICKERLUBE FG 3H DIVIDER OIL is a premium quality divider oil. It is 3H and H1 registered for direct contact and incidental food contact for use in and around food, beverage and pharmaceutical production areas including direct contact with food.

Applications include:

- Dough dividers
- Cutting and slicing machines
- Dicing and mincing machines

FEATURE	BENEFIT
Protects against corrosion	Increased component life
Anti-wear slip protection	Increased component life
Prevents stick-slip	Decreases downtime

Characteristics	VICKERLUBE FG 3H DIVIDER OIL
Appearance	Clear Oil
Density at 15°C (g/cm3)	0.86
Viscosity at 40°C (cSt)	35
Flash Point (°C)	232
Pour Point (°C)	-21
Shelf Life	3 years in original sealed containers whilst stored out of direct sunlight
20L pail	 45463-020
208L drum	 45463-208
1000L IBC	 45463-001

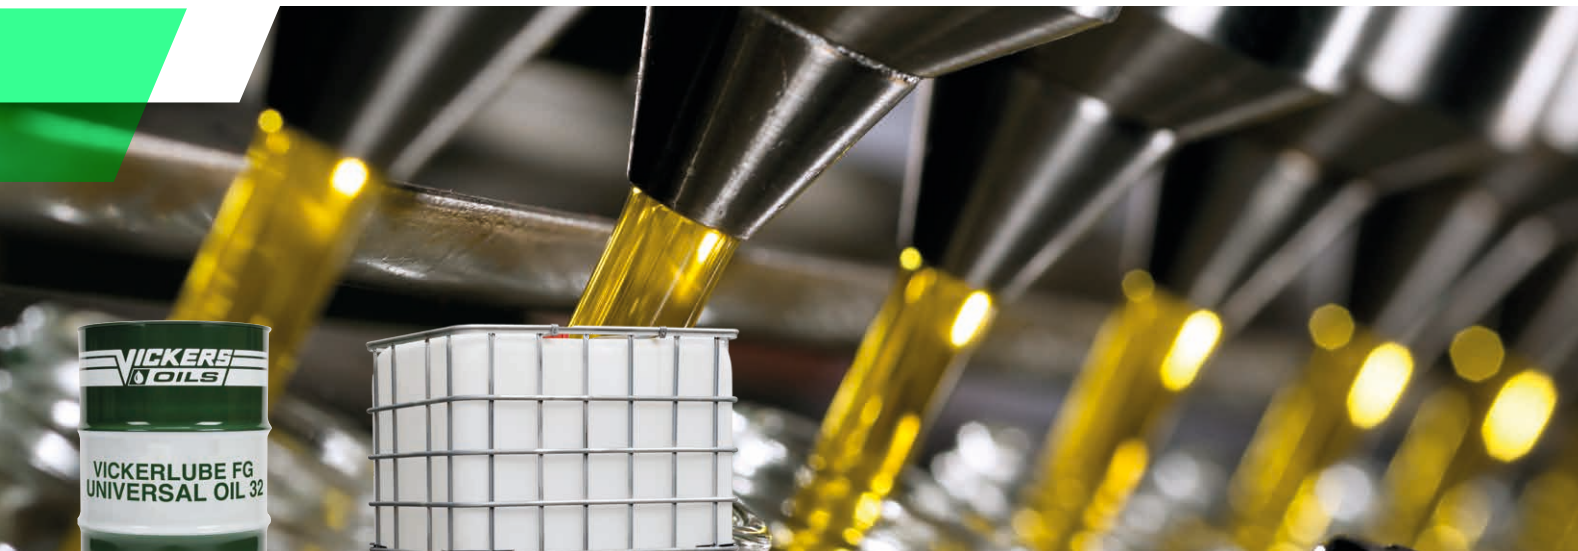

208L 1000L

VICKERLUBE FG UNIVERSAL OIL 32

Food Grade ISO 32 General Purpose Oil



VICKERLUBE FG UNIVERSAL OIL 32 is a premium quality general purpose oil. It is registered to H1 for incidental food contact, for use in and around food, beverage, and pharmaceutical production areas.

Applications include:

- Primarily intended for wash down and short term (overnight) corrosion protection and light lubrication for food manufacturing equipment

FEATURE	BENEFIT
Protects against corrosion	Increased component life
Non-odour or tainting	No effect on food stuff

Characteristics	VICKERLUBE FG UNIVERSAL OIL 32
Appearance	Clear and Bright
Density at 15°C (g/cm3)	0.86
Viscosity at 40°C (cSt)	32
Flash Point (°C)	>185
Pour Point (°C)	<-9
Shelf Life	3 years in original sealed containers whilst stored out of direct sunlight
20L pail	 45782-020
208L drum	 45782-208
1000L IBC	 45783-001



208L 20L

VICKERLUBE FG SUGARSOL

Food Grade Sugar Dissolving & Light Lubricating Oil



VICKERLUBE FG SUGARSOL is a low viscosity product formulated to remove deposits of sugar in the confectionary and sugar industries. It is registered to H1 for incidental food contact for use in and around food, beverage and pharmaceutical processing and production areas..

Applications include:

- Confectionary industry – initial cleaning of sticky surfaces after machine operation
- Mould release agent – confectionary, chocolate etc.
- Cutters on saw blades, circular saws, chains, conveyor bands, blender surfaces etc.

FEATURE	BENEFIT
Excellent sugar dissolving properties	Prevents against separation and crystallisation
Corrosion inhibited	Protects against corrosion
Light lubrication properties	Prevents further corrosion and stick slip

Characteristics	VICKERLUBE FG SUGARSOL
Appearance	Clear and Bright
Density at 15°C (kg/l)	1.04
Viscosity at 40°C (cSt)	4
Pour Point (°C)	-15
Shelf Life	2 years in original sealed containers whilst stored out of direct sunlight
20L pail	 45364-020
208L drum	 45364-208



208L

500 g

VICKERLUBE FG MULTI-TAK

Food Grade Anti-Seize & Assembly Paste



VICKERLUBE FG MULTI-TAK is a high temperature semi-synthetic anti-seize and open gear lubricant. It is registered to H1 for incidental food contact for use in and around food, beverage and pharmaceutical processing and production areas.

Applications include:

- Threads as anti-seize
- Open gears
- Studs and flanges

FEATURE	BENEFIT
No dropping point	Product stays in place at elevated temperatures
Extreme temperature resistance	Suitable for extreme temperature applications
Extreme Pressure properties	Good load carrying, protection against shock loads

Characteristics	VICKERLUBE FG MULTI-TAK
Appearance	Smooth White Paste
Thickener	Inorganic
Base Oil	Synthetic
4 Ball Weld Load	600 Kg
Coefficient of Friction	0.12
Temperature Range, as a service lubricant	-30°C to 150°C
Temperature Range, as an anti-seize	-30°C to 1100°C
Shelf Life	2 years in original sealed containers whilst stored out of direct sunlight

500g tub		15901-500
180kg drum		25901-180



20L

VICKERLUBE FGS FRIDGECOM 68

Food Grade Synthetic Refrigeration Compressor Fluid



VICKERLUBE FGS FRIDGECOM 68 is a high performance synthetic PAO oil formulated with the latest additive technology. It is registered to H1 for incidental food contact for use in hydraulic and circulating systems in and around food, beverage and pharmaceutical processing and production areas.

Applications include:


- Cold storage facilities
- Ice making machines
- Circulating systems in chemical plants and mills

FEATURE	BENEFIT
Excellent water resistance	Extends component life
Good air release	Enhanced lubricity
Oxidation and corrosion inhibited	Increases oil life and protects against corrosion

Characteristics	VICKERLUBE FGS FRIDGECOM 68
Appearance	Clear and bright
Viscosity at 40°C (cSt)	68
Viscosity at 100°C (cSt)	10
Viscosity Index	139
Acidity (mgKOH/g)	0.1
Flash point – COC (°C)	>250
Pour point (°C)	-54
Density at 15.6°C (kg/l)	0.84
Shelf Life	5 years in original sealed containers whilst store out of direct sunlight
20L pail	 45222-020



AUSTRALASIA

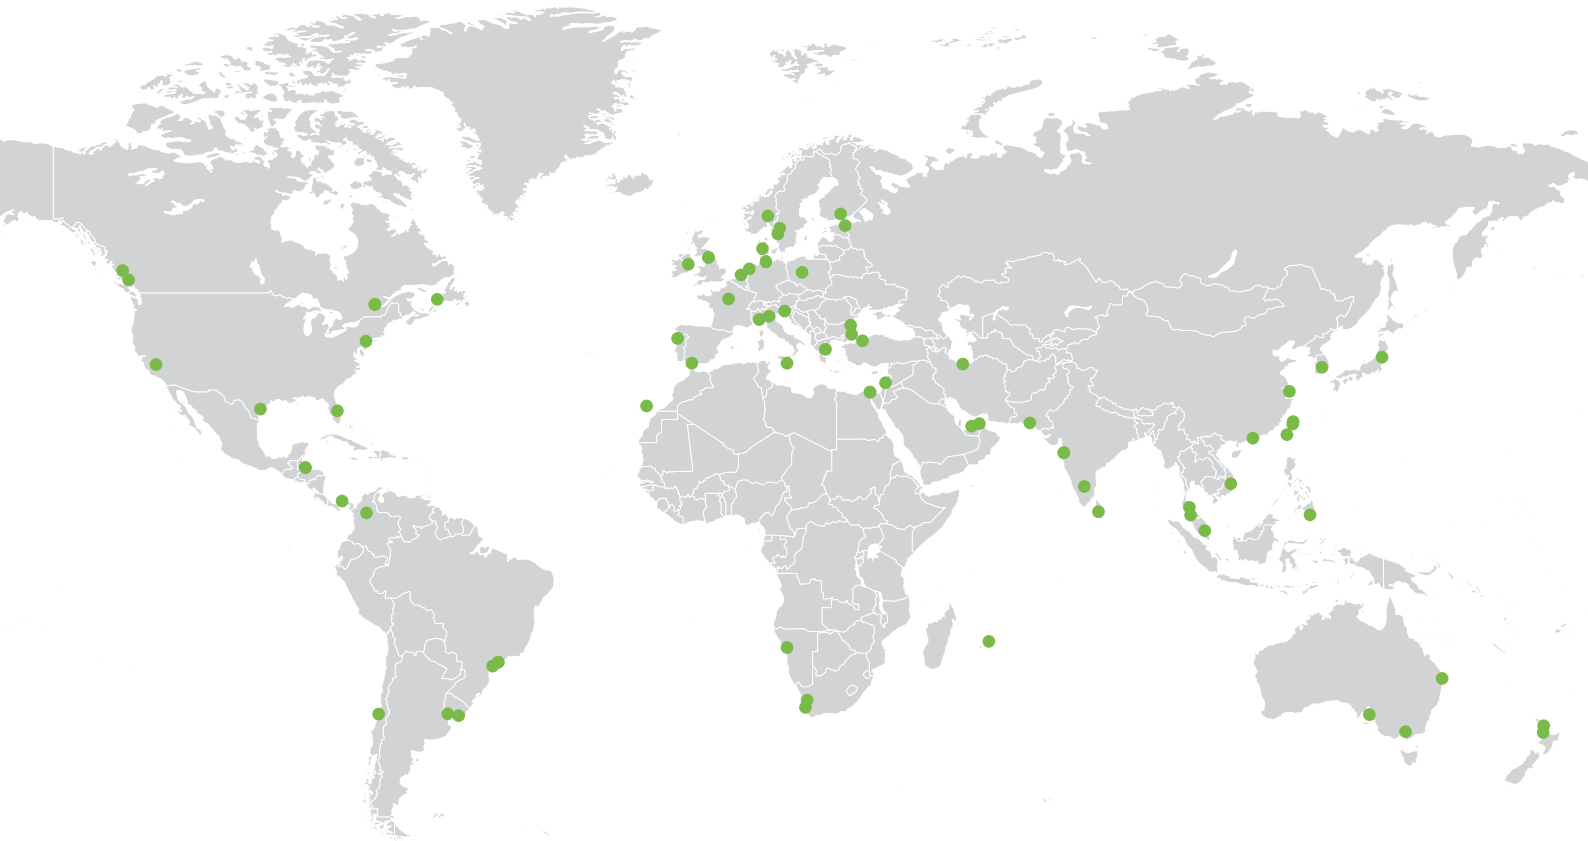

Scan the QR code and use our product selector to see the complete food grade range



VICKERS OILS (AUSTRALASIA) PTY LTD.

Registered Office
111/193 South Pine Road,
Brendale, Queensland
Australia 4500

ABN 77 636 243 340

Tel: +61 (0) 408 729 761
Email: sales.au@vickers-oil.com
Web: www.vickers-oil.com.au

Follow us on



A company of **BENJ[®] R. VICKERS & SONS LTD.**

V2/08/25